


# Keyboard instruction

**\*\*Please read the instructions carefully before use\*\***

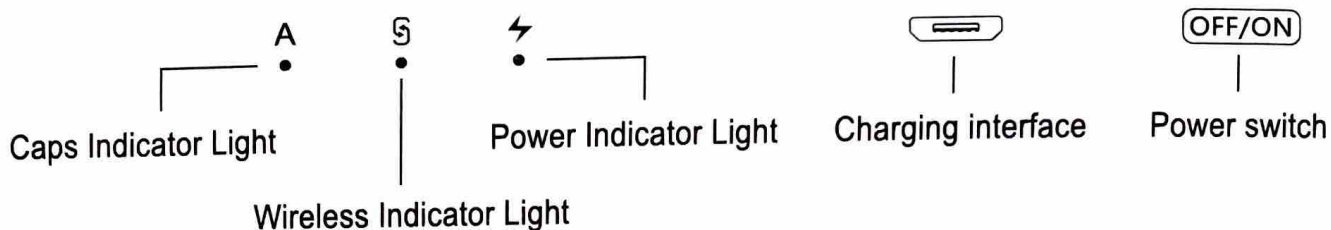

## Keyboard connection operation:

1. Turn on the power supply, and the green indicator light will be lit for one second (if the instruction is red, please charge in time).

Press the matching key "Fn+C/⌘" for 2 second, the Wireless indicator lights flicker into the pairing state, and the effective time is about 120 seconds.

Open the Wireless search function of the external device, click the "Wireless Keyboard" searched.

After the pairing is successful, the indicator lights go out, and you can use the keyboard.

2. If there is no operation in 10 minutes, the keyboard will go to sleep state and wait for 2~3 seconds by any key to wake up.



## Three-channel Bluetooth keyboard connection operation:




1. Turn on the power supply, the green indicator lights for 1 second (if the indicator is red, please charge in time)

Pressing the matching key "Fn+C/⌘" above 2 seconds, the Wireless indicator lights flicker into the pairing state, and the effective time is about 120 seconds.

Open the Wireless search function of the external devices, click the "Wireless Keyboard" searched.

After the pairing is successfully, the indicator lights go out, the first device  is connected by default and you can use the keyboard.

2. Pressing Fn+ or , then pressing the matching key "Fn+C/⌘" above 2 seconds, the Wireless indicator lights flicker into the pairing state, and the effective time is about 120 seconds. Open the Wireless search function of the external devices, click the "Wireless Keyboard" searched. After the pairing is successful, the indicator lights go out, and you can use the keyboard.

3. If there is no operation in 10 minutes, the keyboard will go to sleep state and wait for 2~3 seconds by pressing any key to wake up.
4. Pressing Fn+  or  or  to switch the keyboard between three-channel devices. When switching, the Bluetooth light up, indicating that the switch is completed.

### Disconnect the keyboard connection:


- \* If you want to break the connection between keyboard and device, please clear the pairing information in the device, or turn off the keyboard power directly.

### Electricity indicator:

- \* If the power indicator light is red slowly, the power is low, please charge it in time, the red light is bright when charging. When the indicator is green, it is full, please disconnect the charging power to ensure safety.

**Shortcut function key:** Please note that the function key only works under the corresponding operation interface; If the function key is blue, please press Fn key combination to use; Due to external device or system update, there may be some inconsistency between individual function keys and instructions. If this happens, please refer to the real object.

### Refer to the function key icon for instructions:

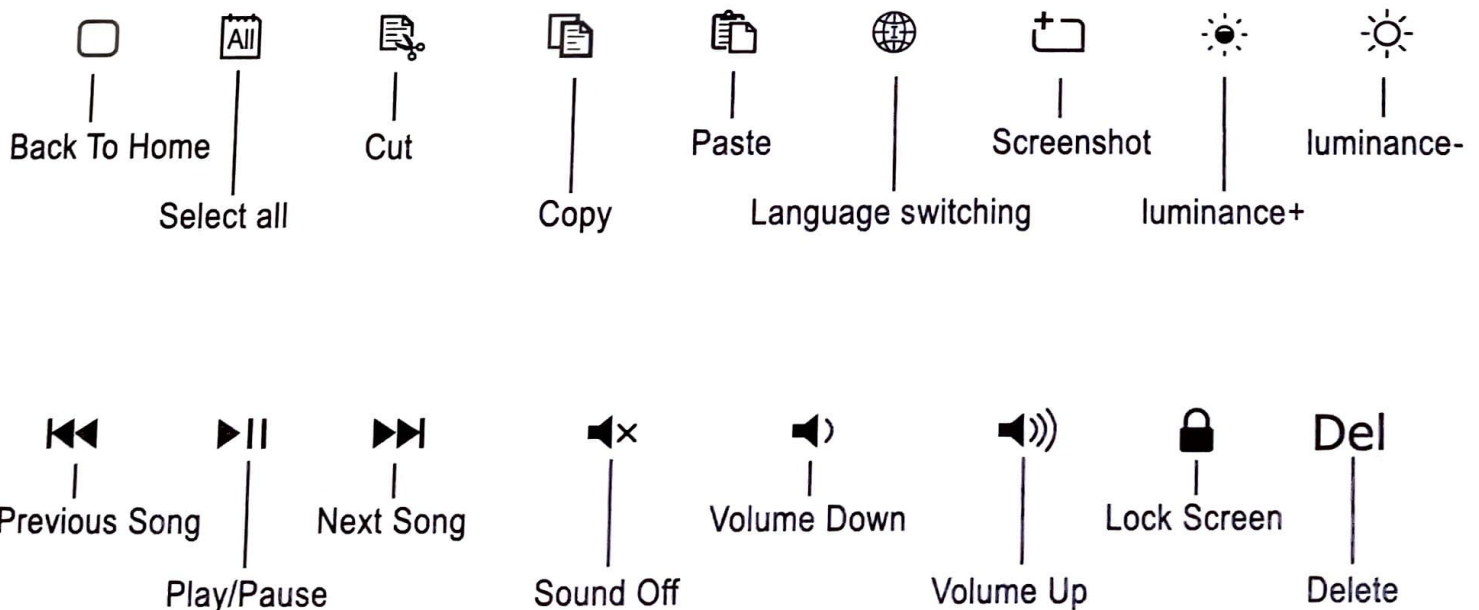





Please refer to the following instructions according to the actual functions of the purchased products : (Partial product support)

## Special key instructions


1.  +  Turn on/off or adjust the backlit.

Operating method: Press once to turn on the backlit; Press again will increase the brightness; The third time will maximize the brightness; The fourth time will turn off the backlit **(only backlight version)**

2.  +  Press these two keys to switch the rainbow backlight and white color **(only backlight version)**


3. Breathing light model: Two key combinations,  +  can control breathing light off/on  
 +  can adjust the speed of the breathing light. **(only backlight version)**

4. Innovative intelligent voice input function:

Click the input state in the Text area of WeChat or memo, continuously click  to enter the voice state, you can turn voice to text in real time. **(only IOS)**

5. Partial character shortcut keys:

Select all:  +  Copy:  +  Paste:  +  Shear:  + 

6.  Switch uppercase or lowercase: connect with iPad, open setting of iPad → universal → physical keyboard → turn off using the caps lock key to switch languages

7. Fn+PgUP=home page Fn+PgDn=terminate

**Basic parameters:** (part of the parameters are objective factors will vary).

Working Voltage:	3.0V~4.2V	Working Current:	≤ 3.0mA
Working Time:	≥80 Hours	Low Voltage Alert:	3.0~3.3V
Sleeping Current:	≤0.3mA	Battery Standby Time:	≥ 100 Days
Battery Capacity:	≥ 150mAh	Keystrokes:	50g~70g
Keyboard Lifetime:	300 Million Times	Charge Input:	5V --- 1A
Connect Distance:	≤ 10m	Charging Time:	2~3 Hours
Charging Current:	≤200mA	Awaken Time:	2~3 Seconds
Charging Port:	Micro USB (or Type-C)	Working Temperatur:	14°F - 131°F
Matching Password:	No		

### **Maintenance and warning:**

- \* Do not squeeze or twist, clap the keyboard.
- \* Do not scan the microwave and get away from the magnetic field.
- \* Away from the liquid and used in a dry environment.
- \* Clean the keyboard with soft cloth, do not turn off the power for a long time.
- \* Other routine maintenance of electronic products.


### **Common connection Troubleshooting:**

- \* Make sure the power is turned on and the battery is sufficient.
- \* Make sure that the keyboard is within the range of working distance.
- \* Make sure that the Wireless related function of the device has been opened.
- \* Make sure that the keyboard and the device have been paired.
- \* Clear device pairing record and turn off Wireless function; re match.
- \* Please do not connect multiple Bluetooth keyboards at the same time; if necessary, please connect one by one.
- \* Please try to change charging cable if repeated failure to charge.
- \*\* This product will not be updated in time for continuous product improvement. If there is any discrepancy, please refer to physical products.


Touch the trackpad: Different operating system, gesture command will be different, please refer to the actual situation of the product.

## One Finger


---




Left-click(customized):  
Tap with single finger to click




Slide the pointer:  
Move with single finger



Drag items: Tap twice  
with single finger, then  
hold and drag around  
(only IOS support)



Open all active apps:  
Slider down from the  
top with single finger  
(only IOS support)




Open/hide the bottom application bar:  
Slide up from down with single finger  
(only IOS support)

## Double Fingers


---




Switch windows: Slide  
your fingers from right to  
left with both fingers




Switch windows: Slide  
your fingers from left to  
right with both fingers



Right-click(customized):  
Tap with two fingers to  
right-click




Roller scroll: Swipe with  
two finger the left/right  
or scroll up/down

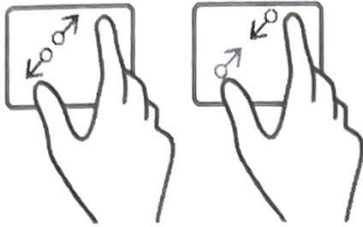


Zoom in /Zoom (out safari/Maps)

## Three Fingers


---



Open the recently used windows: (Switch back to the previous application windows) Three fingers moving down at the same time (**only IOS support**)



Return to the home page: All three fingers moving up at the same time.



Active window: (left/right slide switch) Slide three fingers simultaneously left and right (**only IOS support**)

## Four Fingers

---



Screenshot: Tap with four fingers

Note:

\* Operating system : IOS 13.4 and above

(Equipment must support touch)

\* Custom settings ( when wireless pairing is successful):

Settings→Accessibility→Touch→Assistive Touch→Devices→Connected devices→Customize Additional Buttons→Set the action on the trackpad→Select instruction

\*  +  Turn on/off touchpad function

**\*We won't note you if changing the content of user manual.**

**MADE IN CHINA**